
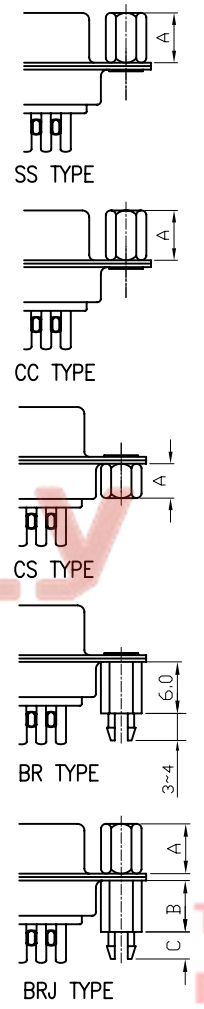


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/26/05'		LJC 09/26/05'
B	整理图面	YCH 05/26/07'		LJC 05/26/07'
C	增加锁螺丝类型	YCH 06/30/07'		

NOTES:

- ELECTRICAL CHARACTERISTICS:
    - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
    - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
    - INSULATION RESISTANCE: 1000MΩ Min.
  - ENVIRONMENT CHARACTERISTICS:
 

TEMPERATURE RANGE: -45°C~+105°C.
  - PART NUMBER: DS1035
  - PRODUCT NUMBER CODE:  
DS1035- X X X X X X X
- SCREW DIM. A
    - S: Standard(W/O nut)
    - 1: 3.00
    - 2: 4.00
    - 3: 4.50
    - 4: 5.00
    - 5: 5.50
    - 6: 5.80
  - SCREW TYPE
    - S: Standard(W/O nut)
    - 1: CC TYPE
    - 2: CS TYPE
    - 3: BR TYPE
    - 4: BRJ TYPE DIM. A:5.80 B:6.00 C: 3~4
    - 5: BRJ TYPE DIM. A:5.80 B:6.00 C: 5~6
  - CONTACT PLATING
    - 8: FULL GOLD FLASH
    - Si: SELECTIVE GOLD FLASH
  - SHELL PLATING
    - T: FORNT & BACK SHELL TIN
    - N: FORNT SHELL NICKEL, BACK SHELL TIN
  - HOUSING COLOR
    - B: BLACK
    - W: WHITE
    - U: BLUE
  - CONNECTOR TYPE
    - M: MALE
    - F: FEMALE
  - No.OF CONTACTS
    - 15: 15pos.
    - 26: 26pos.
    - 44: 44pos.
    - 62: 62pos.

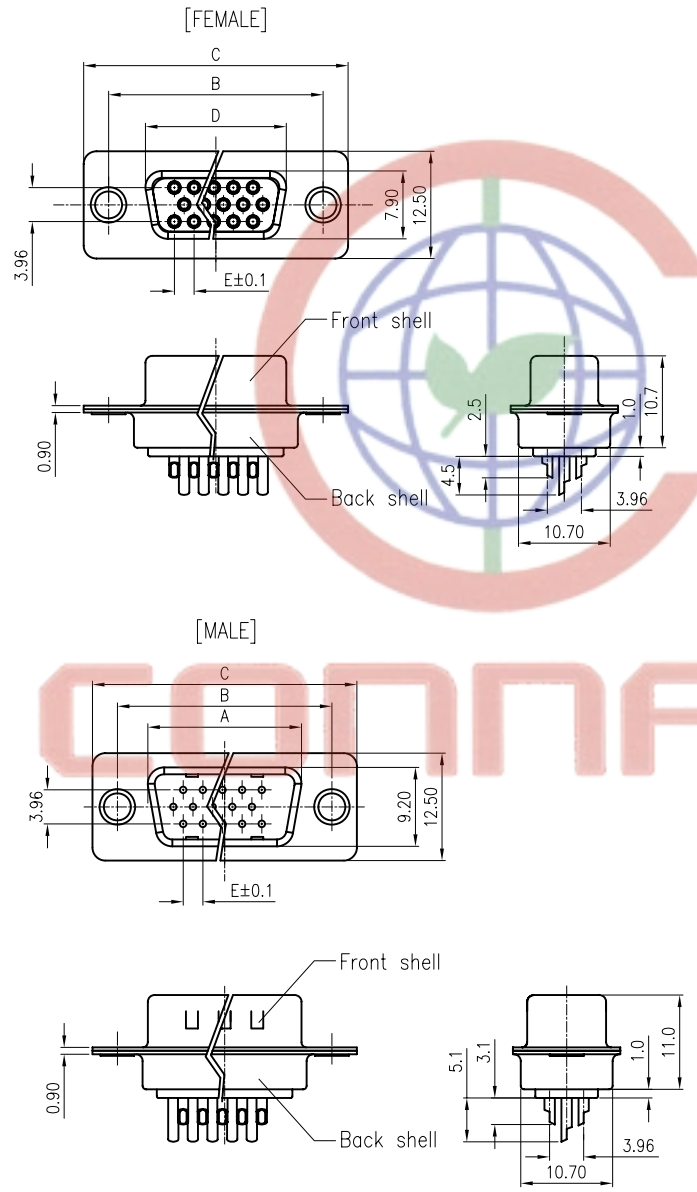

Dimension

Position	A±0.2	B±0.2	C±0.3	D	E
15	17.90	24.99	30.80	16.33	2.29
26	26.50	33.32	39.14	24.66	2.29
44	40.00	47.04	53.04	38.38	2.29
62	56.50	63.50	69.32	54.84	2.14
78	54.30	61.00	67.04	52.34	2.14

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER
SCALE	1:1
DRAWING NO.	C-DS1035-XXXXXXX








PROJECTION	TITLE
	D-SUB H.D SOLDER TYPE

UNITS	SHEET SIZE	SERIES
mm	A4	DS1035 SERIES


Tel: 86-574-63508787  
Fax: 86-574-63510817

晨翔电子有限公司  
CONNFLY CONNFLY ELECTRONIC CO. LTD


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 12/06/06'		LJC 12/06/06'
B	增加锁螺丝类型	YCH 06/30/07'		

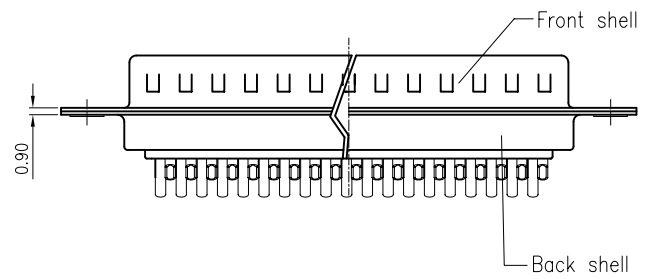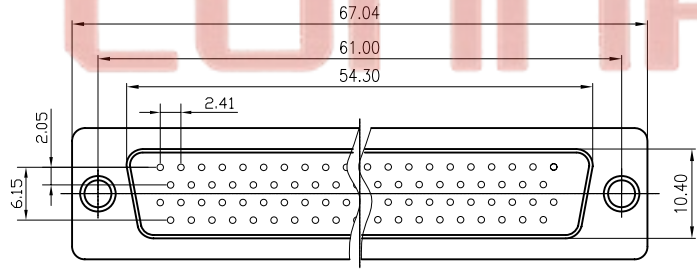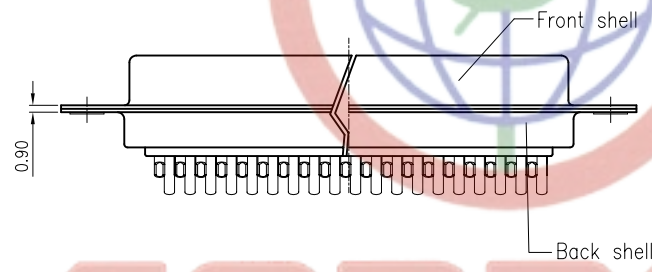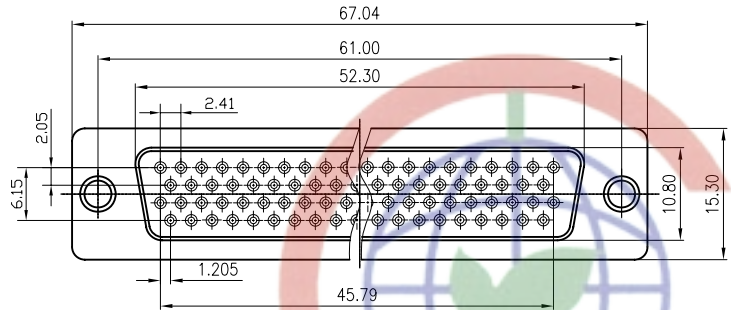


SS TYPE




CC TYPE



CS TYPE



BR TYPE



BRJ TYPE

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 

TEMPERATURE RANGE: -45°C~+105°C.
- PRODUCT NUMBER CODE:
 

DS1035- X X X X X X X

  - SCREW DIM. A
    - S: Standard(W/O nut)
    - 1: 3.00
    - 2: 4.00
    - 3: 4.50
    - 4: 5.00
    - 5: 5.50
    - 6: 5.80
  - SCREW TYPE
    - S: Standard(W/O nut)
    - 1: CC TYPE
    - 2: CS TYPE
    - 3: BR TYPE
    - 4: BRJ TYPE DIM. A:5.80 B:6.00 C: 3~4
    - 5: BRJ TYPE DIM. A:5.80 B:6.00 C: 5~6
  - CONTACT PLATING
    - 8: FULL GOLD FLASH
    - Si: SELECTIVE GOLD FLASH
  - SHELL PLATING
    - T: FORNT & BACK SHELL TIN
    - N: FORNT SHELL NICKEL, BACK SHELL TIN
  - HOUSING COLOR
    - B: BLACK
    - W: WHITE
    - U: BLUE
  - CONNECTOR TYPE
    - M: MALE
    - F: FEMALE
  - No.OF CONTACTS
    - 78: 78pos.

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		D-SUB H.D SOLDER TYPE
.X	±0.38	.X	±3°	UNITS	mm
.XX	±0.25	.XX	±2°	SHEET SIZE	A4
DRAWING TYPE	CUSTOMER	Add.: West		晨翔电子有限公司	
SCALE	1:1	SHEET	1 OF 1	CONNFLY CONNFLY ELECTRONIC CO. LTD	
DRAWING NO.	C-DS1035-78XXXXXX	1315321			