
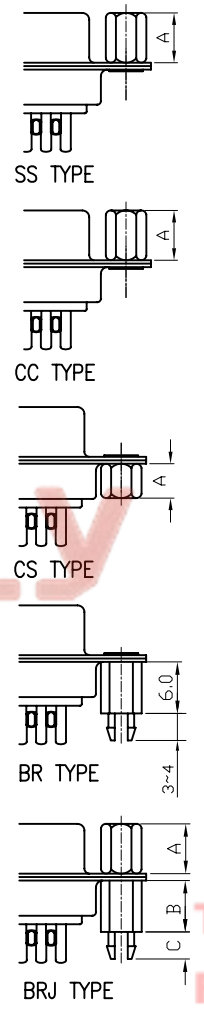


| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|-------------|---------------|---------|---------------|
| A | NEW RELEASE | LJH 09/26/05' | | LJC 09/26/05' |
| B | 整理图面 | YCH 05/26/07' | | LJC 05/26/07' |
| C | 增加锁螺丝类型 | YCH 06/30/07' | | |

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - ENVIRONMENT CHARACTERISTICS:

TEMPERATURE RANGE: -45°C~+105°C.
 - PART NUMBER: DS1035
 - PRODUCT NUMBER CODE:
DS1035- X X X X X X X
- SCREW DIM. A
 - S: Standard(W/O nut)
 - 1: 3.00
 - 2: 4.00
 - 3: 4.50
 - 4: 5.00
 - 5: 5.50
 - 6: 5.80
 - SCREW TYPE
 - S: Standard(W/O nut)
 - 1: CC TYPE
 - 2: CS TYPE
 - 3: BR TYPE
 - 4: BRJ TYPE DIM. A:5.80 B:6.00 C: 3~4
 - 5: BRJ TYPE DIM. A:5.80 B:6.00 C: 5~6
 - CONTACT PLATING
 - 8: FULL GOLD FLASH
 - Si: SELECTIVE GOLD FLASH
 - SHELL PLATING
 - T: FORNT & BACK SHELL TIN
 - N: FORNT SHELL NICKEL, BACK SHELL TIN
 - HOUSING COLOR
 - B: BLACK
 - W: WHITE
 - U: BLUE
 - CONNECTOR TYPE
 - M: MALE
 - F: FEMALE
 - No. OF CONTACTS
 - 15: 15pos.
 - 26: 26pos.
 - 44: 44pos.
 - 62: 62pos.

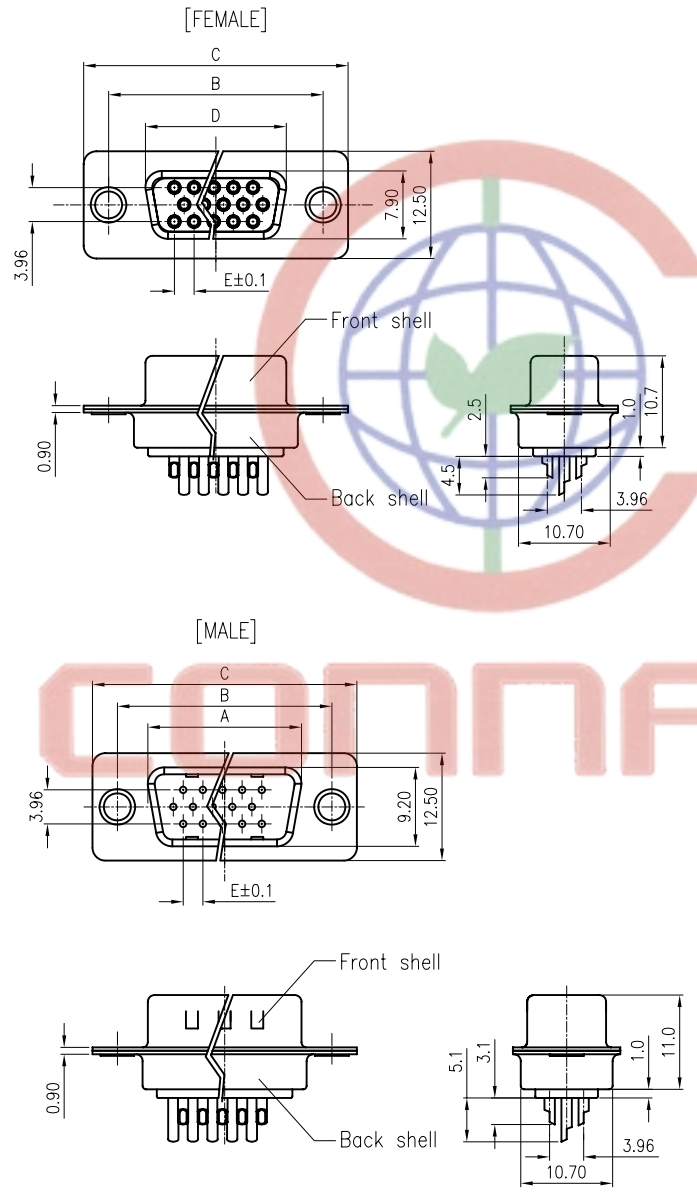

Dimension

| Position | A±0.2 | B±0.2 | C±0.3 | D | E |
|----------|-------|-------|-------|-------|------|
| 15 | 17.90 | 24.99 | 30.80 | 16.33 | 2.29 |
| 26 | 26.50 | 33.32 | 39.14 | 24.66 | 2.29 |
| 44 | 40.00 | 47.04 | 53.04 | 38.38 | 2.29 |
| 62 | 56.50 | 63.50 | 69.32 | 54.84 | 2.14 |
| 78 | 54.30 | 61.00 | 67.04 | 52.34 | 2.14 |

| GENERAL TOLERANCE | | ANGLE TOLERANCE | |
|-------------------|-------|-----------------|-----|
| X. | ±0.60 | X. | ±5° |
| .X | ±0.38 | .X | ±3° |
| .XX | ±0.25 | .XX | ±2° |








| DRAWING TYPE | | CUSTOMER | |
|--------------|------------------|----------|--------|
| SCALE | 1:1 | SHEET | 1 OF 1 |
| DRAWING NO. | C-DS1035-XXXXXXX | | |

| PROJECTION | TITLE |
|------------|-----------------------|
| | D-SUB H.D SOLDER TYPE |
| UNITS | mm |
| SHEET SIZE | A4 |
| SERIES | DS1035 SERIES |


Tel: 86-574-63508787
Fax: 86-574-63510817

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD


| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|-------------|---------------|---------|---------------|
| A | NEW RELEASE | LL 12/06/06' | | LJC 12/06/06' |
| B | 增加锁螺丝类型 | YCH 06/30/07' | | |

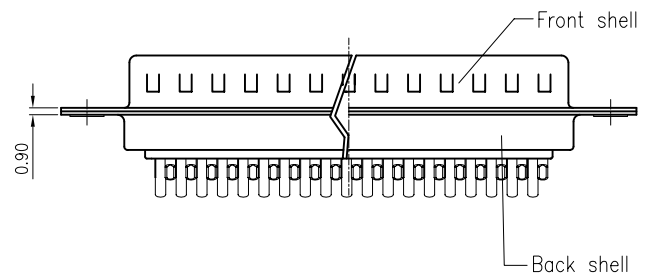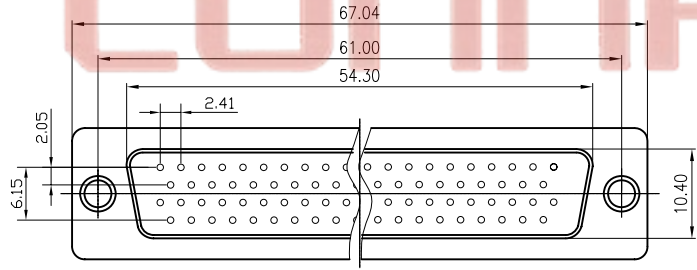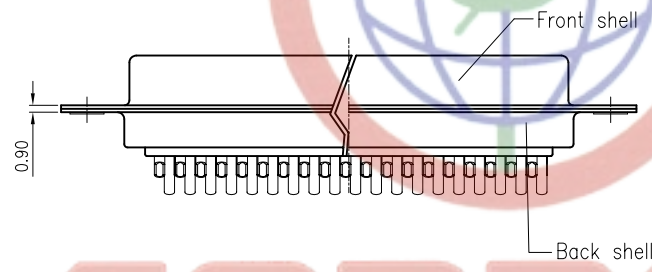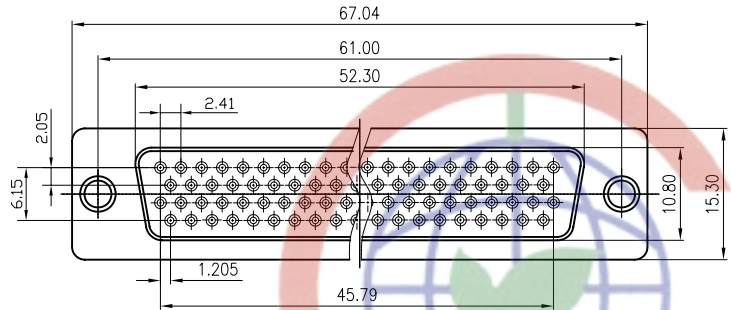


SS TYPE




CC TYPE



CS TYPE



BR TYPE



BRJ TYPE



NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:

TEMPERATURE RANGE: -45°C~+105°C.
- PRODUCT NUMBER CODE:

DS1035- X X X X X X X

 - SCREW DIM. A
 - S: Standard(W/O nut)
 - 1: 3.00
 - 2: 4.00
 - 3: 4.50
 - 4: 5.00
 - 5: 5.50
 - 6: 5.80
 - SCREW TYPE
 - S: Standard(W/O nut)
 - 1: CC TYPE
 - 2: CS TYPE
 - 3: BR TYPE
 - 4: BRJ TYPE DIM. A:5.80 B:6.00 C: 3~4
 - 5: BRJ TYPE DIM. A:5.80 B:6.00 C: 5~6
 - CONTACT PLATING
 - 8: FULL GOLD FLASH
 - Si: SELECTIVE GOLD FLASH
 - SHELL PLATING
 - T: FORNT & BACK SHELL TIN
 - N: FORNT SHELL NICKEL, BACK SHELL TIN
 - HOUSING COLOR
 - B: BLACK
 - W: WHITE
 - U: BLUE
 - CONNECTOR TYPE
 - M: MALE
 - F: FEMALE
 - No.OF CONTACTS
 - 78: 78pos.

| | | | | | |
|-------------------|-------------------|---|--------|---|-----------------------|
| GENERAL TOLERANCE | | ANGLE TOLERANCE | | PROJECTION | TITLE |
| X. | ±0.60 | X. | ±5° | | D-SUB H.D SOLDER TYPE |
| .X | ±0.38 | .X | ±3° | UNITS | mm |
| .XX | ±0.25 | .XX | ±2° | SHEET SIZE | A4 |
| DRAWING TYPE | CUSTOMER | Add.: West | | SERIES | DS1035 SERIES |
| SCALE | 1:1 | SHEET | 1 OF 1 | 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD | |
| DRAWING NO. | C-DS1035-78XXXXXX | 86-574-63508787 86-574-63510817 Email: sales@zhongxi.com.cn Http://www.zhongxi.com.cn 1315321 | | | |