

Dimension


Position	A±0.2	B±0.2	C±0.2	D
9	17.90	24.99	30.84	16.33
15	26.50	33.32	39.14	24.66
25	40.00	47.04	53.04	38.38
37	56.50	63.50	69.32	54.84

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/13/06'		LJC 05/13/06'
B	ADD SCREW TYPE	DMJ 06/27/07'		LJC 06/27/07'
C	整理图画	YCH 09/22/07'		LJC 09/22/07'
D	增加端子电镀全锡	YCH 03/12/08'		

- NOTES:
- PRODUCTS PERFORMANCE:
    - VOLTAGE RATING: 250V AC.
    - CONTACT CURRENT RATING: 1.5A MAX. PER PIN.
    - CONTACT RESISTANCE: 20mΩ MAX.
    - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
    - INSULATION RESISTANCE: 1000MΩ MINI.
    - TEMPERATURE RANGE: -45°C~+105°C.
  - PRODUCT NUMBER CODE:

DS1037 - X X X X X X X X

- SCREW DIM. E
  - 4: 4.80mm
  - 5: 5.80mm
  - 6: 4.80mm(inside thread M2.6\*0.45p, outside thread unc#4-40)
- BOARD LOCK DIM. F
  - 4: 4.00mm
  - 7: 3.70mm
- CONTACT PLATING
  - T: SELECTIVE GOLD FLASH
  - Si: FULL GOLD FLASH
  - 6: FULL TIN
- COLOR OF HOUSING
  - K: BLACK
  - B: BLUE
- SCREW TYPE
  - A: WITH SCREW TYPE
  - B: WITH RIVET TYPE
  - C: WITH SCREW AND RIVET TYPE
  - D: RIVET TYPE WITH SCREWS IN BULK PACKAGE
- SHELL PLATING
  - N: Nickel
  - T: Tin
- CONNECTOR TYPE
  - M: MALE
  - F: FEMALE
- No. OF CONTACT
  - 09: 9pos. 25: 25pos.
  - 15: 15pos. 37: 37pos.

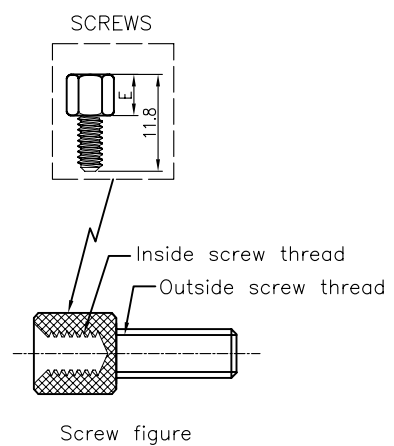

Tel: 86-574-63508787  
Fax: 86-574-63510817

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		D-SUB RIGHT ANGLE(7.2mm) TYPE
.X	±0.38	.X	±3°	mm	
.XX	±0.25	.XX	±2°	A4	SERIES DS1037 SERIES
DRAWING TYPE	CUSTOMER	Add: West Road, Ningbo China			
SCALE	1:1	SHEET	1 OF 1		
DRAWING NO.	C-DS1037-XXXXXXX				

晨翔电子有限公司  
CONNFLY CONNFLY ELECTRONIC CO. LTD