


Three-terminal positive Voltage regulator

78L09

■ Features

- Maximum Output current: $I_{OM} = 0.1 \text{ A}$
- Output voltage : $V_O = 9 \text{ V}$
- Continuous total dissipation : $P_D = 0.625 \text{ W}$

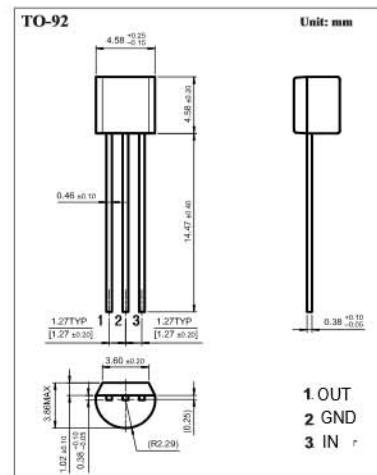


■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Input Voltage	V_I	30	V
Operating Junction Temperature Range	T_{OPR}	-55 to 125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150	$^\circ\text{C}$

■ Electrical Characteristics ($V_I=16V, I_O=40mA, 0^\circ\text{C} < T_j < 125^\circ\text{C}, C_1=0.33\mu\text{F}, C_0=0.1\mu\text{F}$, unless otherwise specified)


Parameter	Symbol	Testconditons	Min	Typ	Max	Unit
Output voltage	V_O	$T_j=25^\circ\text{C}$	8.64	9.0	9.36	V
		$12V \leq V_I \leq 24V, I_O=1\text{mA}-40\text{mA}$	8.55	9.0	9.45	V
		$I_O=1\text{mA}-70\text{mA}$	8.55	9.0	9.45	V
Load Regulation	ΔV_O	$T_j=25^\circ\text{C}, I_O=1\text{mA}-100\text{mA}$		19	90	mV
		$T_j=25^\circ\text{C}, I_O=1\text{mA}-40\text{mA}$		11	40	mV
Line regulation	ΔV_O	$12V \leq V_I \leq 24V, T_j=25^\circ\text{C}$		45	175	mV
		$13V \leq V_I \leq 24V, T_j=25^\circ\text{C}$		40	125	mV
Quiescent Current	I_Q			4.1	6.0	mA
Quiescent Current Change	ΔI_Q	$13V \leq V_I \leq 24V$			1.5	mA
	ΔI_Q	$1\text{mA} \leq I_O \leq 40\text{mA}$			0.1	mA
Output Noise Voltage	V_N	$10\text{Hz} \leq f \leq 100\text{KHz}$		58		uV
Ripple Rejection	R_R	$15V \leq V_I \leq 25V, f=120\text{Hz}, T_j=25^\circ\text{C}$		45		dB
Dropout Voltage	V_d	$T_j=25^\circ\text{C}$		1.7		V

■ Typical Application

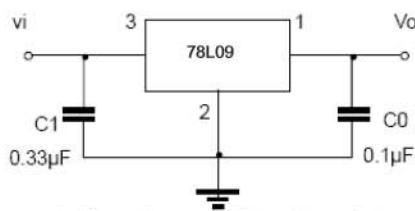


78L09**Typical Characteristics**


L78L05/12/24 Output Characteristics

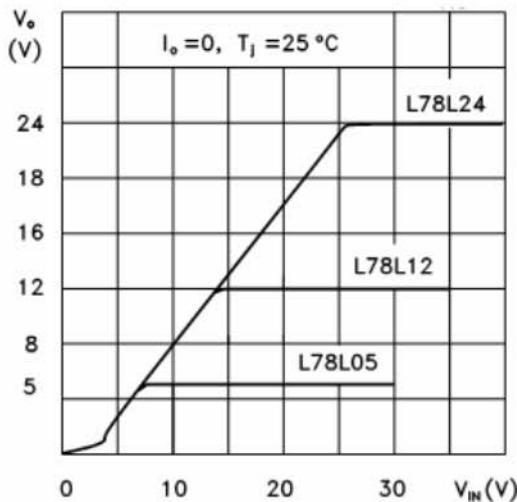


L78L05/12/24 Thermal Shutdown

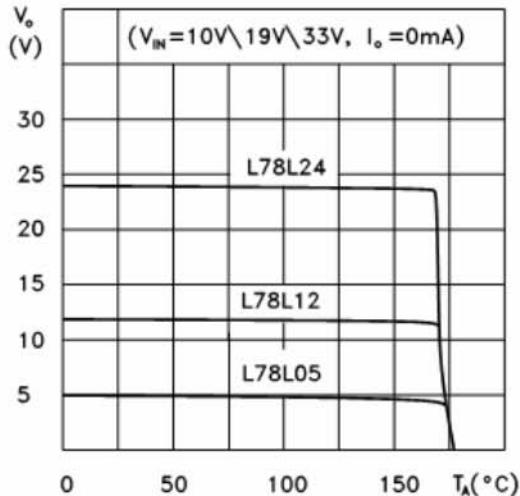

L78L05 Quiescent Current vs Input Voltage

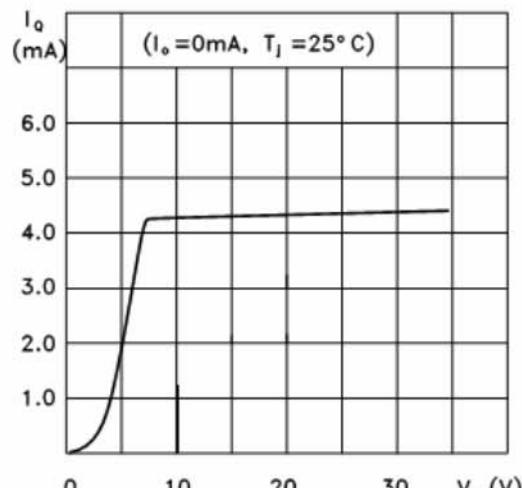

L78L05/12/24 Load Characteristics

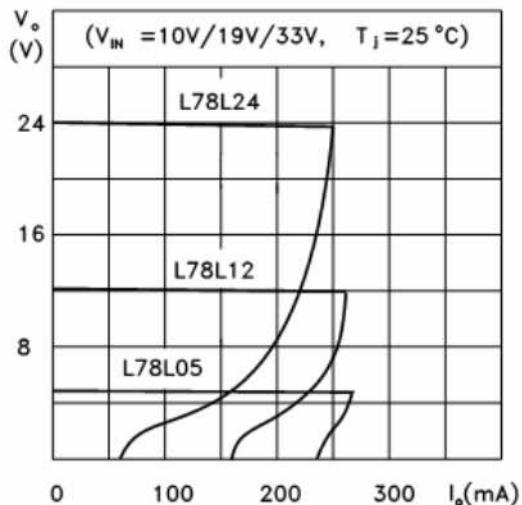

L78L00 Series Short Circuit Output Current

