


电气性能/Electrical	
额定电压/Rated voltage	150V
额定电流/Rated current	6A
使用线径/Wire range	26-18AWG
耐电压/Withstanding voltage	AC1250V/1Min
机械性能/Mechanical	
温度范围/Temp. range	-40℃~+105℃
剥线长度/Strip length	6.0-7.0mm
扭力/Torque	0.15Nm (1.3Lb-in)
尺寸/Dimenslons	
间距/Pitch	2.54mm
极数/Poles	2P-24P
材质及电镀/Material	
塑件/Housing	PA66, UL94V-0
焊针/Welding needle	Brass, Tin plated
螺丝/Screw	M1.6, steel Zinc plated
方块/Wire guard	Brass, Ni plated

订购方式:
HOW TO ORDER

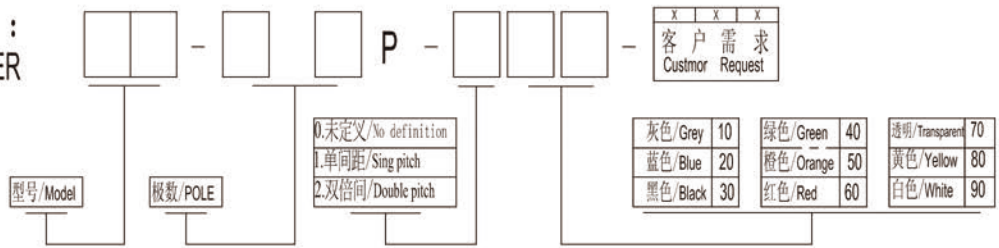

NAME: LF120-2.54