


电气性能/Electrical	
额定电压/Rated voltage	300V
额定电流/Rated current	10A
使用线径/Wire range	24-18AWG
耐电压/Withstanding voltage	AC2000V/1Min

机械性能/Mechanical	
温度范围/Temp. range	-40°C~+105°C
剥线长度/Strip length	4.0-5.0mm
扭力/Torque	0.2Nm (1.8Lb-in)

尺寸/Dimensions	
间距/Pitch	3.5/3.96mm
极数/Poles	2P, 3P

材质及电镀/Material	
塑件/Housing	PA66, UL94V-0
焊针/Welding needle	Brass, Tin plated
螺丝/Screw	M2, steel Zinc plated
弹片/Spring	Stainless Steel

订购方式:  
HOW TO ORDER

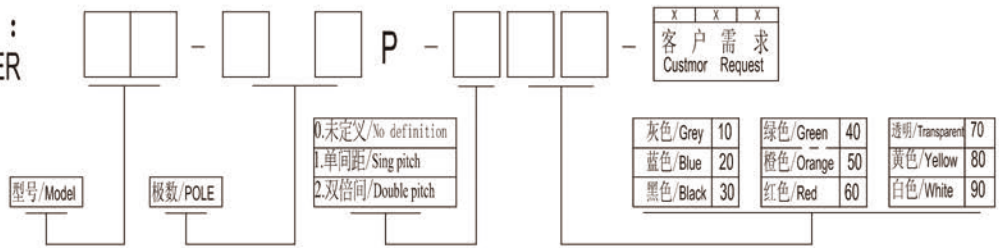

NAME: LF396R-3.5/3.96