

电气性能/Electrical

参考标准/standard	UL	IEC
额定电压/Rated voltage	300V	250V
额定电流/Rated current	15A	24A
使用线径/Wire range	22-14AWG	2.5mm ²
耐电压/Withstanding voltage	AC2000V/1Min	

机械性能/Mechanical

温度范围/Temp. range	-40℃~+105℃	
剥线长度/Strip length	4.0-6.0mm	
扭力/Torque	0.4Nm (3.5Lb-in)	


尺寸/Dimensions

间距/Pitch	5.0mm
极数/Poles	2P, 3P

材质及电镀/Material

塑件/Housing	PA66, UL94V-0
焊针/Welding needle	Brass, Tin plated
螺丝/Screw	M2.5, steel Zinc plated
方块/Wire guard	Brass, Ni plated

订购方式:
HOW TO ORDER

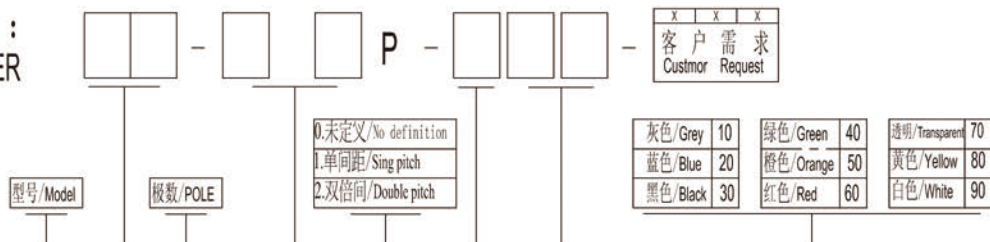

NAME: LF330-5.0