

### 电气性能/Electrical

|                          |              |
|--------------------------|--------------|
| 额定电压/Rated voltage       | 300V         |
| 额定电流/Rated current       | 8A           |
| 耐电压/Withstanding voltage | AC2000V/1Min |

### 机械性能/Mechanical

|                   |   |
|-------------------|---|
| 温度范围/Temp. range  | $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$ |
| 剥线长度/Strip length | 7.0-9.0mm                                       |


### 尺寸/Dimenslons

|          |        |
|----------|--------|
| 间距/Pitch | 3.96mm |
| 极数/Poles | 2P-12P |

### 材质及电镀/Material

|                   |                   |
|-------------------|-------------------|
| 塑件/Housing        | PA66, UL94V-0     |
| 焊针/Welding needle | Brass, Tin plated |

订购方式:  
HOW TO ORDER

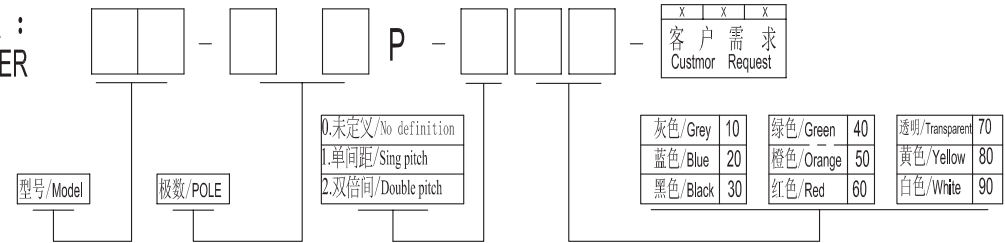

NAME: HT396R-3.96