

### 电气性能/Electrical

额定电压/Rated voltage	300V
额定电流/Rated current	8A
使用线径/Wire range	28-14AWG
耐电压/Withstanding voltage	AC2000V/1Min

### 机械性能/Mechanical

扭力/Torque	0.2Nm(1.8Lb-in)
温度范围/Temp. range	-40℃~+105℃
剥线长度/Strip length	7.0-9.0mm


### 尺寸/Dimenslons

间距/Pitch	3.96mm
极数/Poles	2-12P

### 材质及电镀/Material

塑件/Housing	PA66, UL94V-0
夹子/Clamp	Phosphor bronze, Ni plated
弹片/Spring	Stainless Steel
螺丝/Screw	M2, steel Zinc plated

订购方式:  
HOW TO ORDER

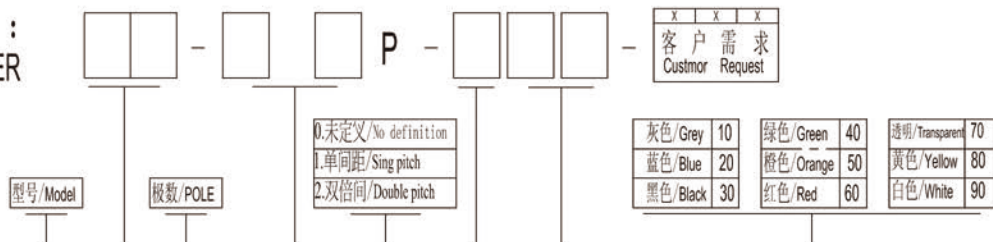

NAME: HT396K-3.96