


电气性能/Electrical		
参考标准/standard	UL	IEC
额定电压/Rated voltage	300V	320V
额定电流/Rated current	15A	15A
机械性能/Mechanical		
温度范围/Temp. range	-40℃~+105℃	
尺寸/Dimenslons		
间距/Pitch	5.08mm	
极数/Poles	2P-14P	
材质及电镀/Material		
塑件/Housing	PA66, UL94V-0	
焊针/Welding needle	Brass, Tin plated	

订购方式:  
HOW TO ORDER

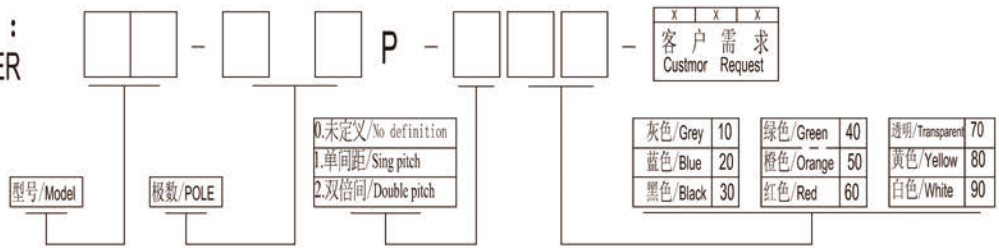

NAME: HT508V-5.08