

电气性能/Electrical

参考标准/standard	UL	IEC
额定电压/Rated voltage	300V	320V
额定电流/Rated current	15A	15A

机械性能/Mechanical

温度范围/Temp. range	-40°C~+105°C
------------------	--------------


尺寸/Dimenslons

间距/Pitch	5.08mm
极数/Poles	2P-14P

材质及电镀/Material

塑件/Housing	PA66, UL94V-0
焊针/Welding needle	Brass, Tin plated

订购方式:
HOW TO ORDER

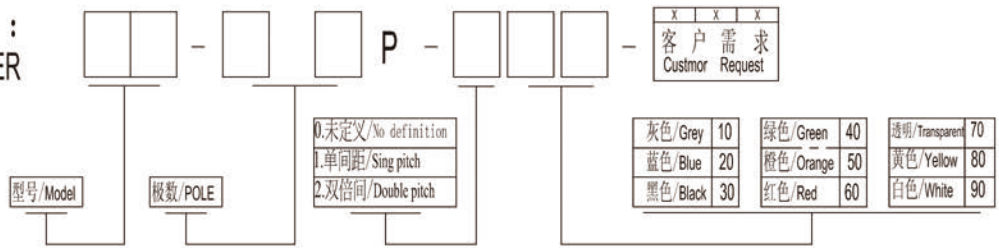

NAME: HT508R-5.08