

电气性能/Electrical

| | | |
|--------------------------|--------------|--------------------|
| 参考标准/standard | UL | IEC |
| 额定电压/Rated voltage | 300V | 300V |
| 额定电流/Rated current | 15A | 15A |
| 使用线径/Wire range | 28-12AWG | 2.5mm ² |
| 耐电压/Withstanding voltage | AC2500V/1Min | |

机械性能/Mechanical

| | |
|-------------------|------------------|
| 温度范围/Temp. range | -40℃~+105℃ |
| 剥线长度/Strip length | 7.0-8.0mm |
| 扭力/Torque | 0.4Nm (3.5Lb-in) |


尺寸/Dimensions

| | |
|----------|--------|
| 间距/Pitch | 5.08mm |
| 极数/Poles | 2P-14P |

材质及电镀/Material

| | |
|------------|----------------------------|
| 塑件/Housing | PA66, UL94V-0 |
| 夹子/Clamp | Phosphor bronze, Ni plated |
| 弹片/Spring | Stainless Steel |
| 螺丝/Screw | M2.5, steel Zinc plated |

订购方式:
HOW TO ORDER

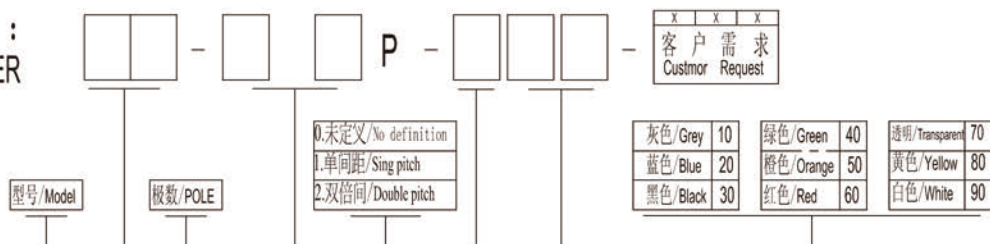

NAME: HT508K-5.08