
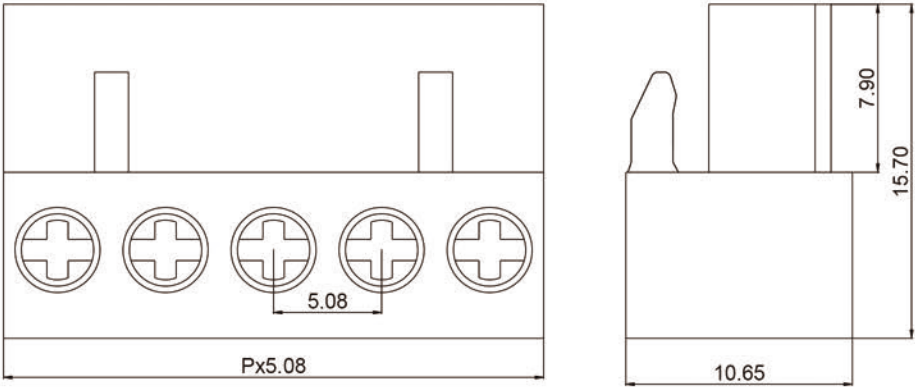


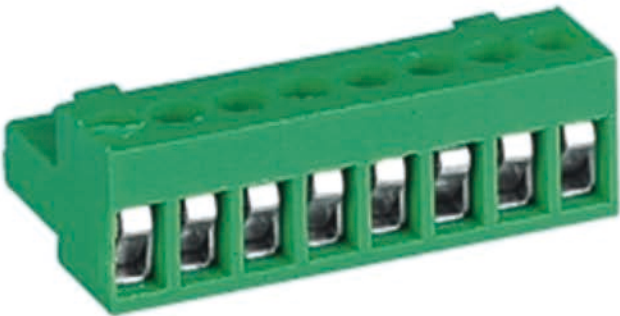

电气性能/Electrical

参考标准/standard	UL	IEC
额定电压/Rated voltage	300V	300V
额定电流/Rated current	15A	15A
使用线径/Wire range	28-12AWG	2.5mm ²
耐电压/Withstanding voltage	AC2500V/1Min	

机械性能/Mechanical

温度范围/Temp. range	-40℃~+105℃
剥线长度/Strip length	7.0-8.0mm
扭力/Torque	0.4Nm (3.5Lb-in)


尺寸/Dimenslons

间距/Pitch	5.08mm
极数/Poles	2P-14P

材质及电镀/Material

塑件/Housing	PA66, UL94V-0
夹子/Clamp	Phosphor bronze, Ni plated
弹片/Spring	Stainless Steel
螺丝/Screw	M2.5, steel Zinc plated

订购方式：
HOW TO ORDER

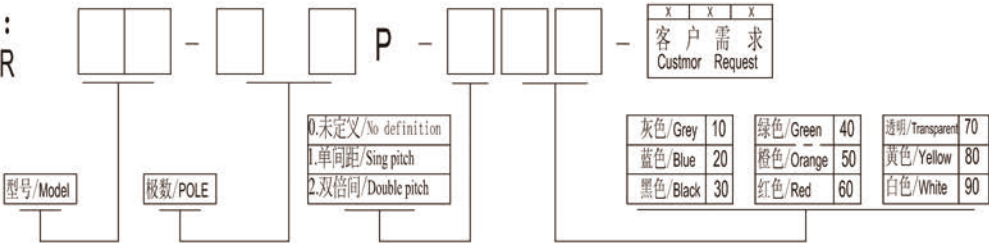

NAME: HT508K-5.08