

电气性能/Electrical

额定电压/Rated voltage	300V
额定电流/Rated current	20A
使用线径/Wire range	22-12AWG
耐电压/Withstanding voltage	AC1600V/1Min

机械性能/Mechanical

温度范围/Temp. range	-40℃~+105℃
扭力/Torque	4.43Lb-in


尺寸/Dimenslons

间距/Pitch	7.62mm
极数/Poles	2P-24P

材质及电镀/Material

塑件/Housing	PA66, UL94V-0
螺丝/Screw	M3, steel Zinc plated
焊针/Welding needle	Brass, Tin plated

订购方式:
HOW TO ORDER

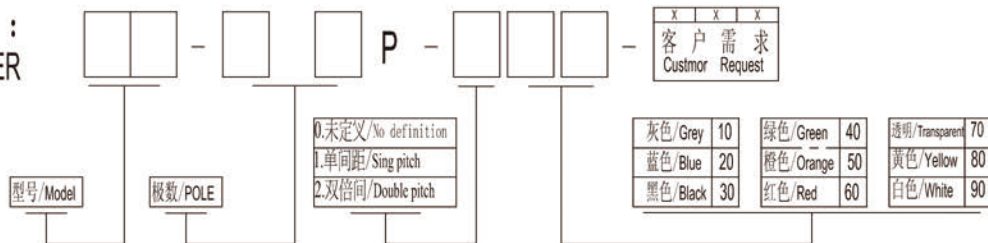

NAME: LF421S/SP-7.62 (LF762)