

### 电气性能/Electrical

额定电压/Rated voltage	750V
额定电流/Rated current	32A
使用线径/Wire range	22-12AWG
耐电压/Withstanding voltage	AC2000V/1Min

### 机械性能/Mechanical

温度范围/Temp. range	-30℃~+105℃
扭力/Torque	1.2Nm


### 尺寸/Dimenslons

间距/Pitch	11.0mm
极数/Poles	2*2P-2*24P

### 材质及电镀/Material

塑件/Housing	PBT, UL94V-0
螺丝/Screw	M4, steel Zinc plated
导体/conductor	Brass, Tin plated

订购方式:  
HOW TO ORDER

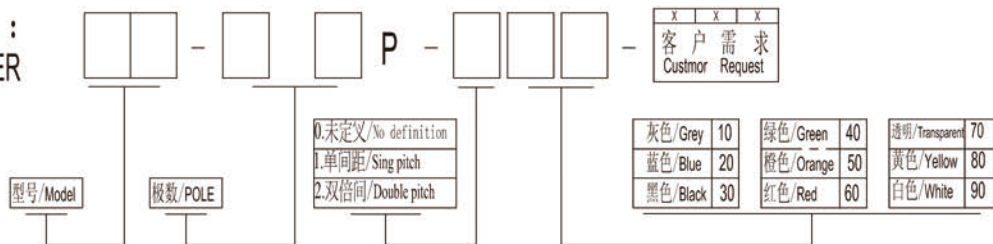

NAME: LF69-11.0