


P.C.B Layout

Position	2 Thru 40
Dimension	4 Thru 80
A±0.20	2.54 X N+0.5
B±0.15	2.54 X N -2.54

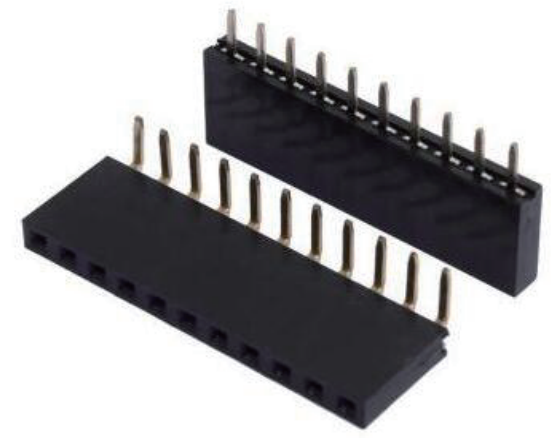

电气性能/Electrical

额定电压/Rated voltage	250V
额定电流/Rated current	3A
耐电压/Withstanding voltage	AC500V/1Min

机械性能/Mechanical

温度范围/Temp. range	-40℃~+105℃
------------------	------------


尺寸/Dimenslons

间距/Pitch	2.54mm
极数/Poles	1P-40P/2*1P-2*40P

材质及电镀/Material

塑件/Housing	PBT/PA6T, UL94V-0
焊针/Welding needle	Brass, Gold plated

订购方式:
HOW TO ORDER

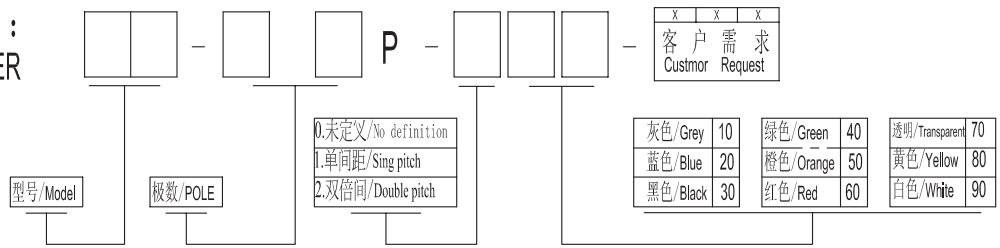

NAME: LF613-2.54