




Position	1 Thru 40
Dimenson	2 Thru 80
A±0.20	2.54xN
B±0.15	2.54xN-2.54




R1 TYPE




R2 TYPE




R1 TYPE



R2 TYPE




P. C. B Layout

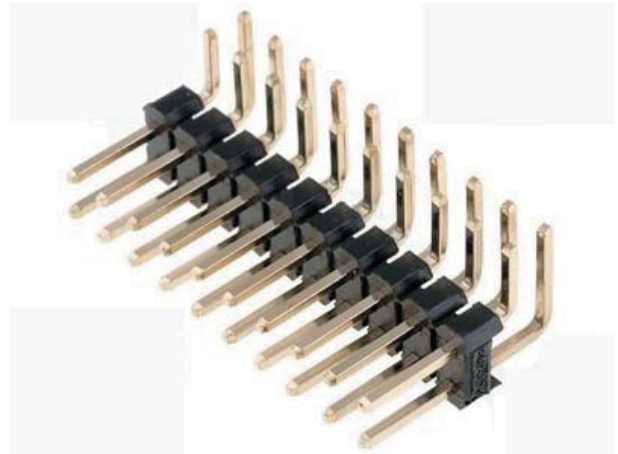

电气性能/Electrical	
额定电压/Rated voltage	250V
额定电流/Rated current	3A
耐电压/Withstanding voltage	AC500V/1Min
机械性能/Mechanical	
温度范围/Temp. range	-40℃~+105℃
尺寸/Dimenslons	
间距/Pitch	2.54mm
极数/Poles	1P-40P
材质及电镀/Material	
塑件/Housing	PBT/PA6T, UL94V-0
焊针/Welding needle	Brass, Gold plated

订购方式:  
HOW TO ORDER

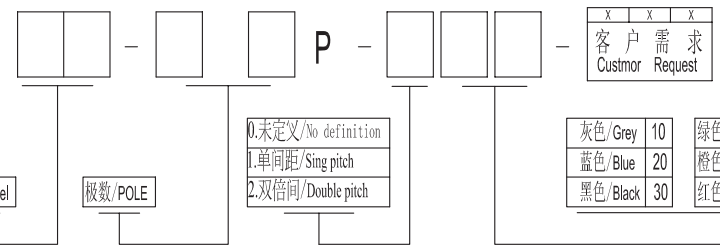

NAME: LF612R-2.54