




Position	1 Thru 40
Dimenson	2 Thru 80
A±0.20	2.54xN
B±0.15	2.54xN-2.54




R1 TYPE





R2 TYPE



R1 TYPE



R2 TYPE

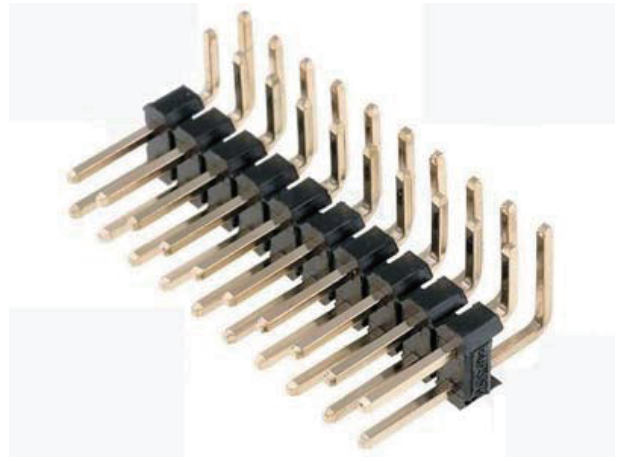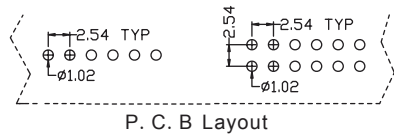

电气性能/Electrical

额定电压/Rated voltage	250V
额定电流/Rated current	3A
耐电压/Withstanding voltage	AC500V/1Min

机械性能/Mechanical

温度范围/Temp. range	-40℃~+105℃
------------------	------------


尺寸/Dimenslons

间距/Pitch	2.54mm
极数/Poles	1P-40P

材质及电镀/Material

塑件/Housing	PBT/PA6T, UL94V-0
焊针/Welding needle	Brass, Gold plated

订购方式:
HOW TO ORDER

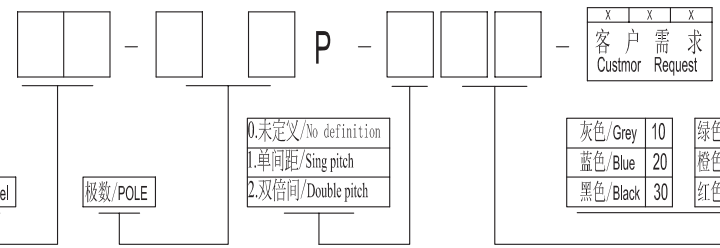

NAME: LF612R-2.54