




Position	1 Thru 40
Dimenson	2 Thru 80
A±0.20	2.54xN
B±0.15	2.54xN-2.54




R1 TYPE




R2 TYPE




R1 TYPE



R2 TYPE



P. C. B Layout

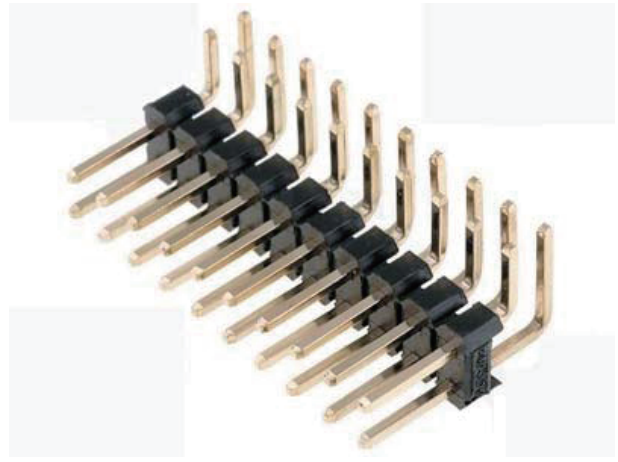

电气性能/Electrical

额定电压/Rated voltage	250V
额定电流/Rated current	3A
耐电压/Withstanding voltage	AC500V/1Min

机械性能/Mechanical

温度范围/Temp. range	-40℃~+105℃
------------------	------------

尺寸/Dimenslons

间距/Pitch	2.54mm
极数/Poles	1P-40P

材质及电镀/Material

塑件/Housing	PBT/PA6T, UL94V-0
焊针/Welding needle	Brass, Gold plated

订购方式:
HOW TO ORDER



型号/Model

极数/POLE

0.未定义/No definition
1.单间距/Sing pitch
2.双倍间距/Double pitch

灰色/Grey	10	绿色/Green	40	透明/Transparent	70
蓝色/Blue	20	橙色/Orange	50	黄色/Yellow	80
黑色/Black	30	红色/Red	60	白色/White	90

NAME: LF612R-2.54