


电气性能/Electrical	
额定电压/Rated voltage	300V
额定电流/Rated current	30A
使用线径/Wire range	22-12AWG
耐电压/Withstanding voltage	AC2000V/1Min
机械性能/Mechanical	
温度范围/Temp. range	-40℃~+105℃
扭力/Torque	1.2Nm/10.6Lb. in
尺寸/Dimenslons	
间距/Pitch	10.0mm
极数/Poles	2P-24P
材质及电镀/Material	
塑件/Housing	PA66, UL94V-0
焊针/Welding needle	Brass, Tin plated
螺丝/Screw	M4, Nickel plated steel

订购方式：
HOW TO ORDER

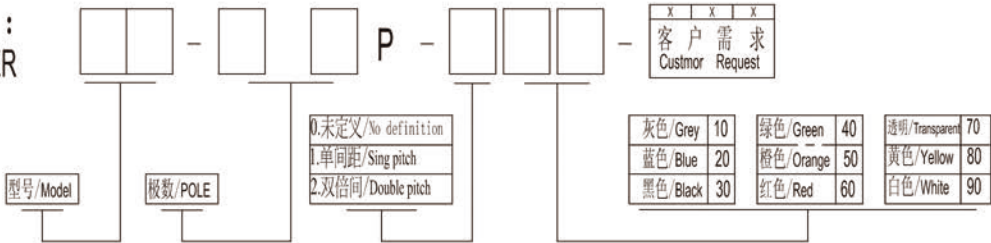

NAME: LF413S-10.0(LF55S)