

电气性能/Electrical

额定电压/Rated voltage	300V
额定电流/Rated current	30A
使用线径/Wire range	22-12AWG
耐电压/Withstanding voltage	AC2000V/1Min

机械性能/Mechanical

温度范围/Temp. range	-40℃~+105℃
扭力/Torque	1.2Nm/10.6Lb.in


尺寸/Dimenslons

间距/Pitch	10.0mm
极数/Poles	2P-24P

材质及电镀/Material

塑件/Housing	PA66, UL94V-0
焊针/Welding needle	Brass, Tin plated
螺丝/Screw	M4, Nickel plated steel

订购方式:
HOW TO ORDER

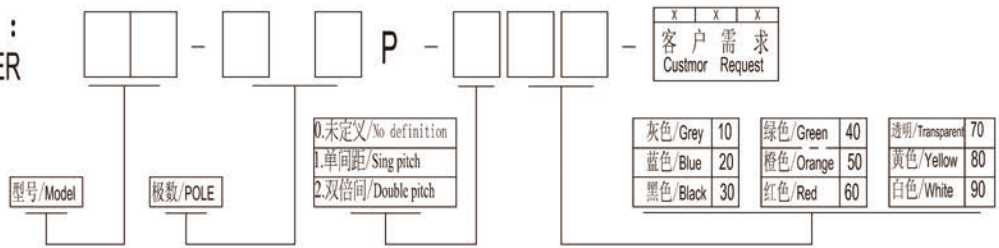

NAME: LF413S-10.0 (LF55S)