

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 06/24/06'		

SPECIFICATION

1. Insulation Resistance:1000MΩ Min.
2. Withstand Voltage:500V AC/Minute.
3. Contact resistance: 50mΩ max.
4. Durability:600 Mating Cycles Min.
5. Product Number Code:

DS1132-X X X X X X

Ear Support

X:W/O

S:W/

Housing Materials

P:PBT

N:NYLON

Housing Color

A:Gray

B:Black

Contact Plating

0:Gold Flash

3:Selective 3u" Gold




(6;15;30)Micro Inch

No.Of Contacts

4:4P4C

Connector Type

S:Socket

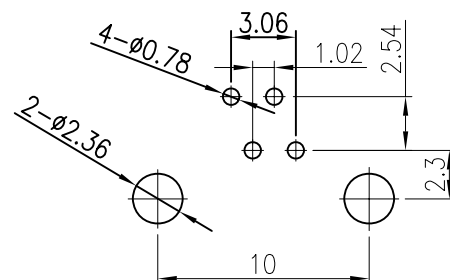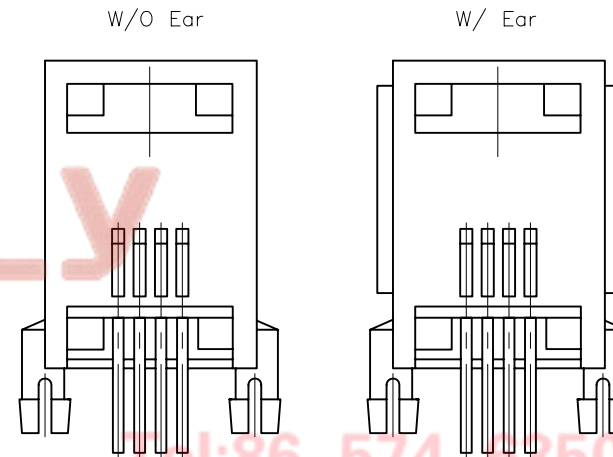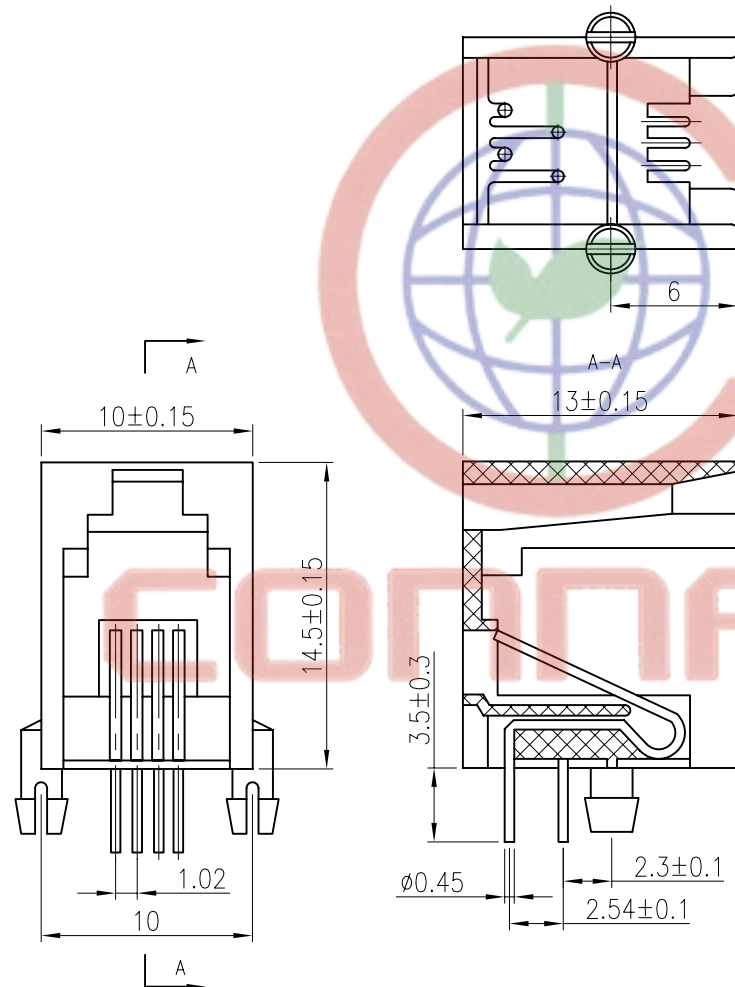

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	UNITS	TITLE
X.	±0.60	X.	±5°	mm	mm	PCB JACK 4P
.X	±0.38	.X	±3°			
.XX	±0.25	.XX	±2°			
DRAWING TYPE	CUSTOMER			SHEET SIZE	SERIES	
SCALE	1:1	SHEET	1 OF 1	A4	DS1132 SERIES	
DRAWING NO.	C-DS1132-XXXXX					



晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD