



STD1802

LOW VOLTAGE FAST-SWITCHING NPN POWER TRANSISTOR

PRELIMINARY DATA

Table 1: GENERAL FEATURES

Ordering Code	Marking	Shipment
STD1802T4	D1802	Tape & Reel

- VERY LOW COLLECTOR TO EMITTER SATURATION VOLTAGE
- HIGH CURRENT GAIN CHARACTERISTIC
- FAST-SWITCHING SPEED
- SURFACE-MOUNTING DPAK POWER PACKAGE IN TAPE & REEL (Suffix "T4")

APPLICATIONS:

- CCFL DRIVERS
- VOLTAGE REGULATORS
- RELAY DRIVERS
- HIGH EFFICIENCY LOW VOLTAGE SWITCHING APPLICATIONS

DESCRIPTION

The device is manufactured in NPN Planar Technology by using a "Base Island" layout. The resulting Transistor shows exceptional high gain performance coupled with very low saturation voltage.

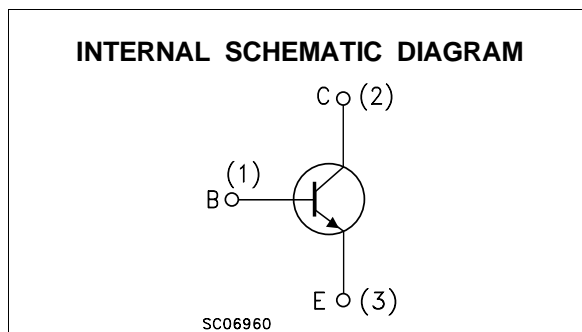
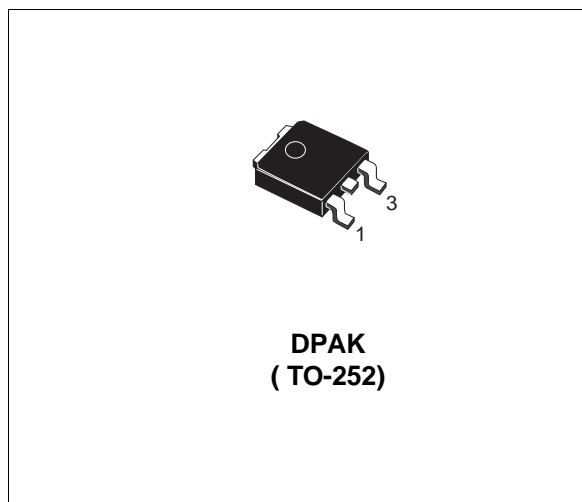


Table 2: ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage ($I_E = 0$)	80	V
V_{CEO}	Collector-Emitter Voltage ($I_B = 0$)	60	V
V_{EBO}	Emitter-Base Voltage ($I_C = 0$)	6	V
I_C	Collector Current	3	A
I_{CM}	Collector Peak Current ($t_p < 5$ ms)	6	A
I_B	Base Current	1	A
P_{tot}	Total Dissipation at $T_{case} = 25$ °C	15	W
T_{stg}	Storage Temperature	-65 to 150	°C
T_j	Max. Operating Junction Temperature	150	°C

Rev. 3

Table 3: THERMAL DATA

$R_{thj-case}$	Thermal Resistance Junction-case	Max	8.33	$^{\circ}C/W$
----------------	----------------------------------	-----	------	---------------

Table 4: ELECTRICAL CHARACTERISTICS ($T_{case} = 25^{\circ}C$ unless otherwise specified)

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
I_{CBO}	Collector Cut-off Current ($I_E = 0$)	$V_{CB} = 40 V$				0.1	μA
I_{EBO}	Emitter Cut-off Current ($I_C = 0$)	$V_{EB} = 4 V$				0.1	μA
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_E = 0$)	$I_C = 100 \mu A$		80			V
$V_{(BR)CEO}^*$	Collector-Emitter Breakdown Voltage ($I_B = 0$)	$I_C = 1 mA$		60			V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage ($I_C = 0$)	$I_E = 100 \mu A$		6			V
$V_{CE(sat)}^*$	Collector-Emitter Saturation Voltage	$I_C = 2 A$ $I_C = 3 A$	$I_B = 100 mA$ $I_B = 150 mA$		150 200	300 400	mV mV
$V_{BE(sat)}^*$	Base-Emitter Saturation Voltage	$I_C = 2 A$	$I_B = 100 mA$		0.9	1.2	V
h_{FE}^*	DC Current Gain	$I_C = 100 mA$ $I_C = 3 A$	$V_{CE} = 2 V$ $V_{CE} = 2 V$	200 100		400	
f_T	Transition frequency	$V_{CE} = 10 V$	$I_C = 50 mA$		150		MHz
C_{CBO}	Collector-Base Capacitance	$V_{CB} = 10 V$	$f = 1 MHz$		50		pF
t_{ON} t_s t_f	RESISTIVE LOAD Turn- on Time Storage Time Fall Time	$I_C = 1 A$ $I_{B1} = - I_{B2} = 0.1 A$	$V_{CC} = 30 V$		50 1.35 120		ns μs ns

* Pulsed: Pulse duration = 300 μs , duty cycle = 1.5 %

Figure 1: Derating Curve

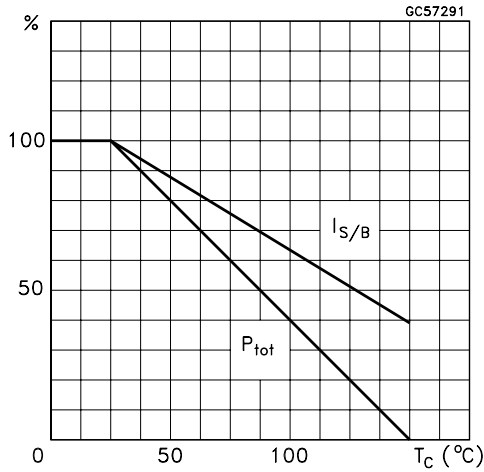


Figure 2: DC Current Gain

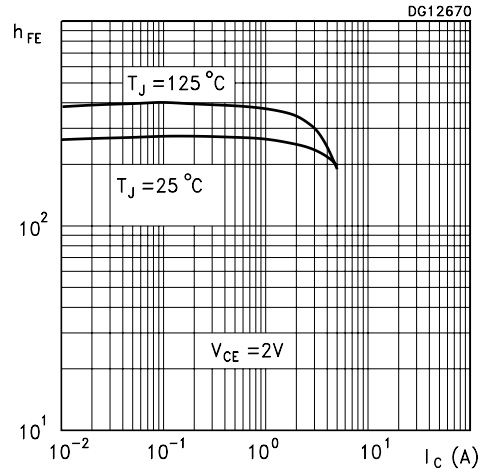


Figure 3: Collector-Emitter Saturation Voltage

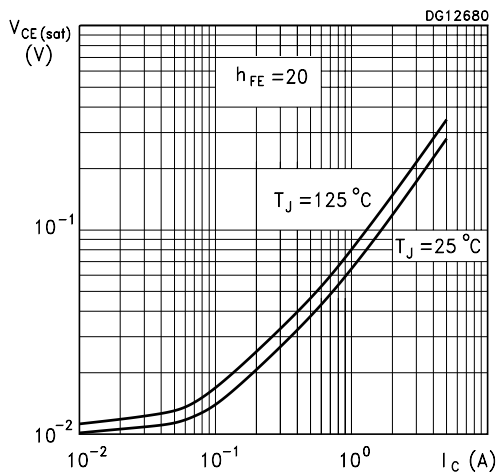


Figure 4: Collector-Emitter Saturation Voltage

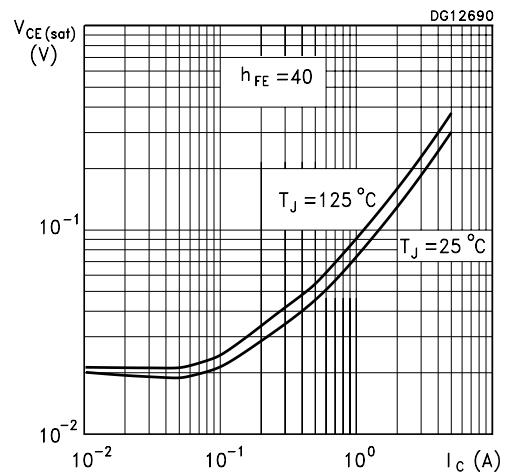


Figure 5: Base-Emitter Saturation Voltage

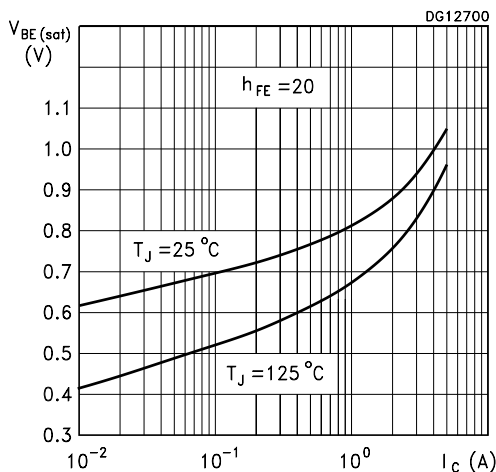


Figure 6: Base-Emitter On Voltage

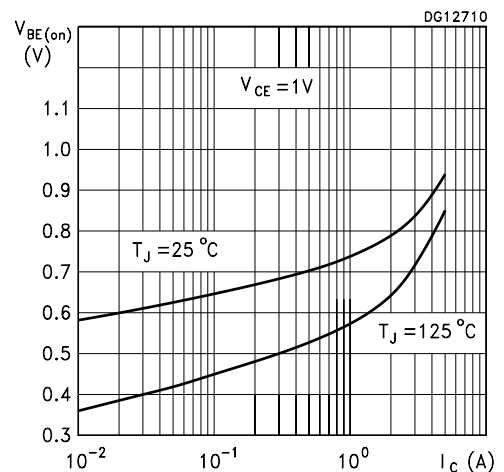


Figure 7: Switching Times Resistive Load

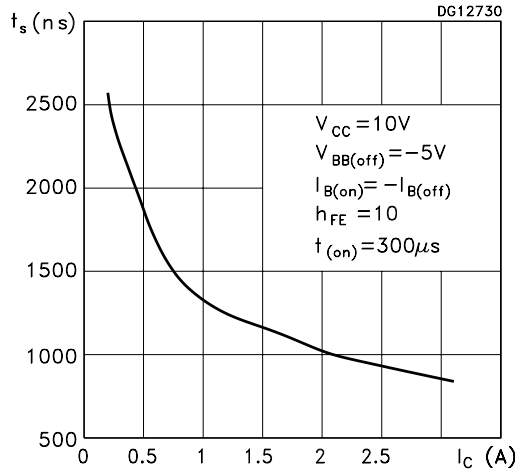


Figure 8: Switching Times Resistive Load

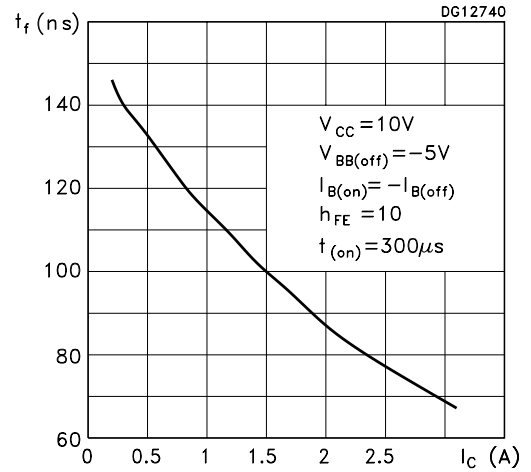


Figure 9: Switching Times Resistive Load

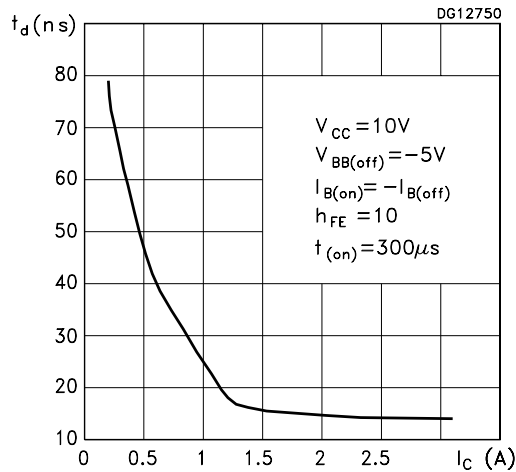


Figure 10: Switching Times Inductive Load

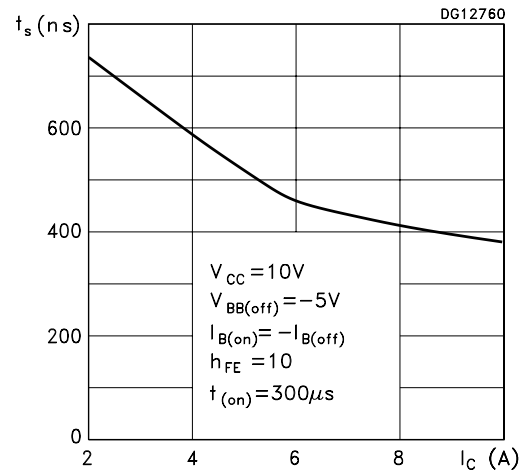


Figure 11: Switching Times Inductive Load

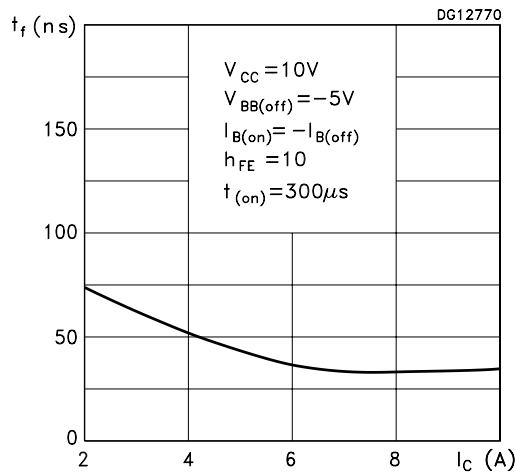


Figure 12: Resistive Load Switching Test Circuit.


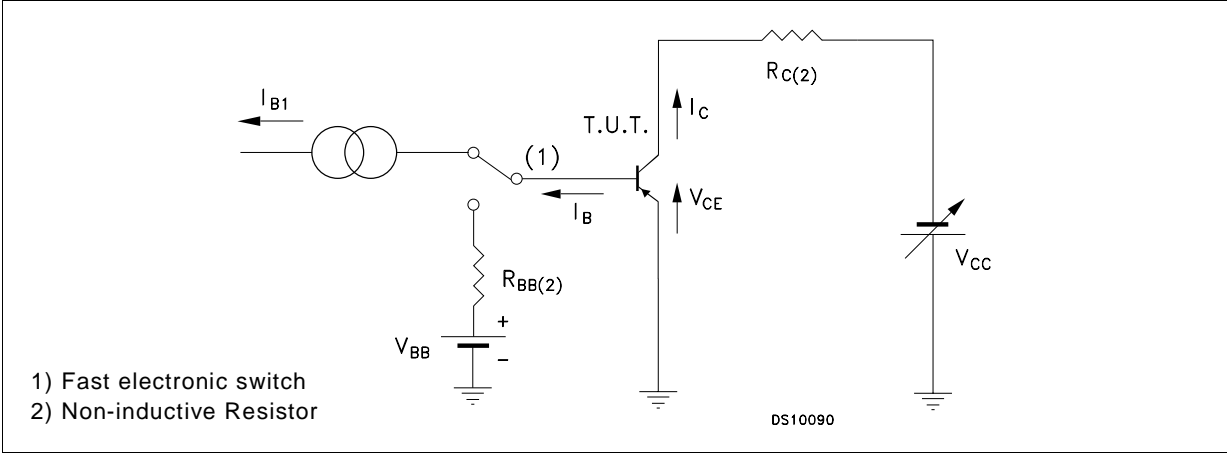


Table 5: Revision History

Date	Revision	Description of Changes
12 July 2004	1	Third Revision

TO-252 (DPAK) MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	2.20		2.40	0.087		0.094
A1	0.90		1.10	0.035		0.043
A2	0.03		0.23	0.001		0.009
B	0.64		0.90	0.025		0.035
B2	5.20		5.40	0.204		0.213
C	0.45		0.60	0.018		0.024
C2	0.48		0.60	0.019		0.024
D	6.00		6.20	0.236		0.244
E	6.40		6.60	0.252		0.260
G	4.40		4.60	0.173		0.181
H	9.35		10.10	0.368		0.398
L2		0.8			0.031	
L4	0.60		1.00	0.024		0.039
V2	0°		8°	0°		0°

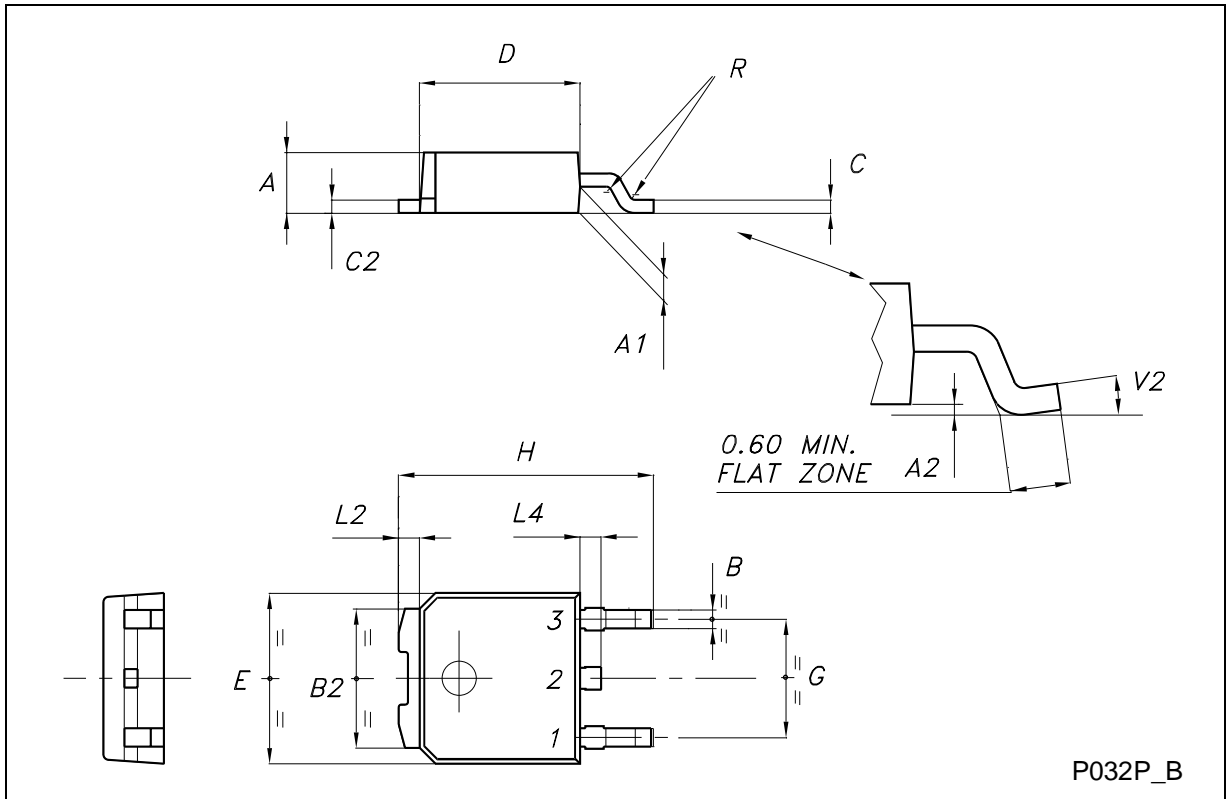

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.

All other names are the property of their respective owners.

© 2004 STMicroelectronics – All Rights reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America.

<http://www.st.com>

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.